


Navigation and Marker Buoys

- Ultra heavy duty central steel core load distribution construction
- US Coast Guard approved inner closed cell rigid urethane buoyancy foam

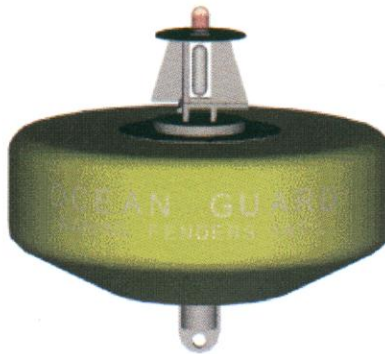

- Impact absorbing, resilient heat laminated cross-linked polyethylene foam core foam
- Thick, tough filament nylon tire cord reinforced urethane skin

OCEAN GUARD NAVIGATIONAL AND MARKER BUOYS

BUOY MODEL	BUOYANCY		BUOY		BUOY		BUOY BODY	
	NET		WEIGHT		DIAMETER		HEIGHT	
	LBS	KG	LBS	KG	FT	M	FT	M
NAV-100	221	100	194	88	3.0	0.9	2.3	0.7
NAV-200	441	200	399	181	3.8	1.2	3.0	0.9
NAV-500	1,103	500	650	295	4.9	1.5	3.0	0.9
NAV-750	1,654	750	981	445	6.7	2.0	3.3	1.0
NAV-1000	2,205	1,000	1,816	824	8.5	2.6	4.2	1.3
NAV-3000	6,615	3,000	3,112	1,412	10.0	3.0	4.5	1.4
NAV-5000	11,025	5,000	4,462	2,024	10.2	3.1	6.0	1.8
NAV-7500	16,538	7,500	6,703	3,040	11.8	3.6	6.6	2.0
NAV-10000	22,050	10,000	7,845	3,558	13.2	4.0	6.0	1.8

* ACTUAL VALUES FOR ABOVE SIZES MAY VARY +/- 15% DUE TO VARIATIONS IN MATERIALS, TEMPERATURES AND TOLERANCES